

# Operating Systems and Networks


## Network Lecture 12: Application Layer

Adrian Perrig  
Network Security Group  
ETH Zürich

## Announcements


## Where we are in the Course

- Starting the Application Layer!
  - Builds distributed “network services” (DNS, Web) on Transport services




## Recall

- Application layer protocols are often part of an “app”
  - But don’t need a GUI, e.g., DNS

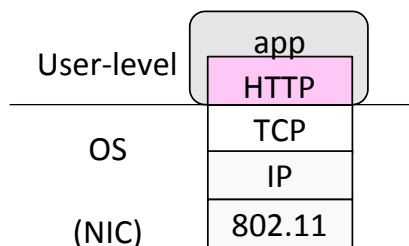


## Recall (2)

- Application layer messages are often split over multiple packets
  - Or may be aggregated in a packet ...

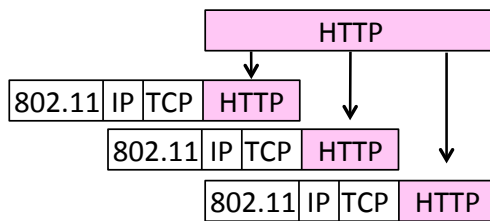

## Application Communication Needs

- Vary widely with app; must build on Transport services

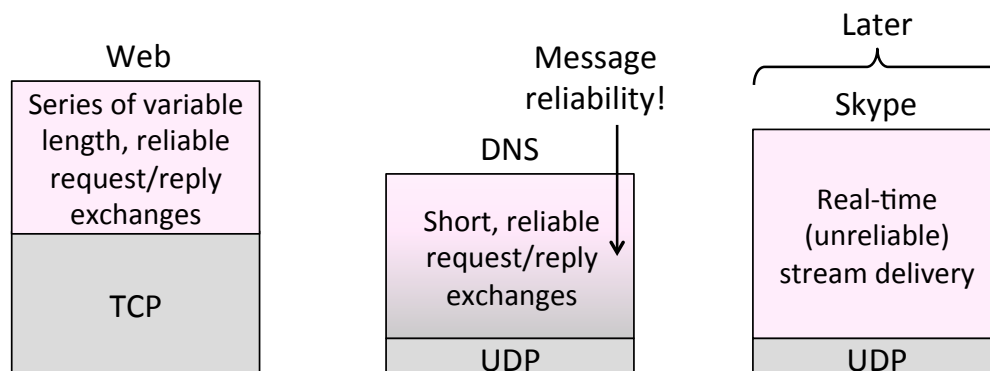

## OSI Session/Presentation Layers

- Remember this? Two relevant concepts ...

But consider part of the application, not strictly layered!

7	Application	– Provides functions needed by users
6	Presentation	– Converts different representations
5	Session	– Manages task dialogs
4	Transport	– Provides end-to-end delivery
3	Network	– Sends packets over multiple links
2	Data link	– Sends frames of information
1	Physical	– Sends bits as signals

Computer Networks

7

## Session Concept

- A session is a series of related network interactions in support of an application task
  - Often informal, not explicit
- Examples:
  - Web page fetches multiple resources
  - Skype call involves audio, video, chat

Computer Networks


8

## Presentation Concept

- Apps need to identify the type of content, and encode it for transfer
  - These are Presentation functions
- Examples:
  - Media (MIME) types, e.g., image/jpeg, identify the type of content
  - Transfer encodings, e.g., gzip, identify the encoding of the content
  - Application headers are often simple and readable versus packed for efficiency

## Evolution of Internet Applications


- Always changing, and growing ...

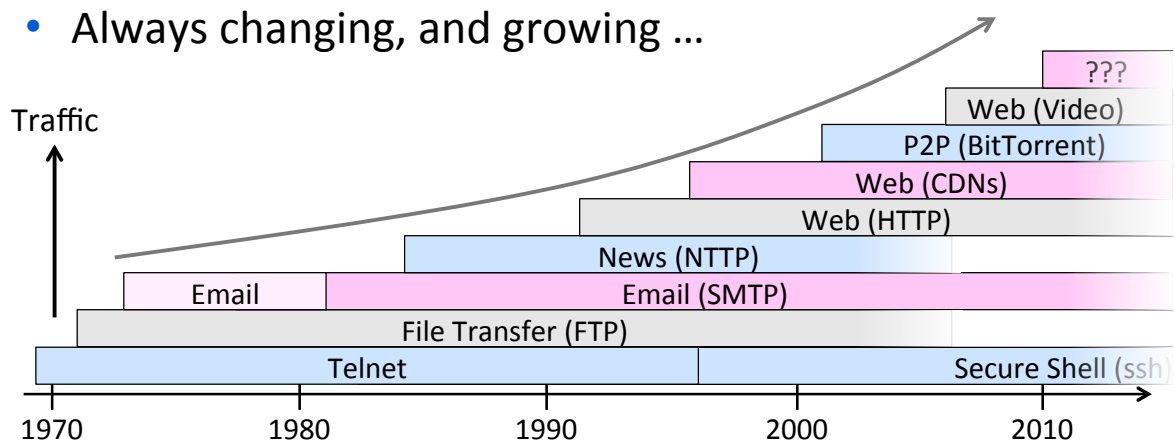


## Evolution of Internet Applications (2)

- For a peek at the state of the Internet:
  - Akamai’s State of the Internet Report (quarterly)
  - Cisco’s Visual Networking Index
  - Mary Meeker’s Internet Report
- Robust Internet growth, esp. video, wireless and mobile
  - Most traffic is video, will be 90% of Internet in a few years
  - Wireless traffic will soon overtake wired traffic
  - Mobile traffic is still a small portion (15%) of overall
  - Growing attack traffic from China, also U.S. and Russia

## Evolution of the Web

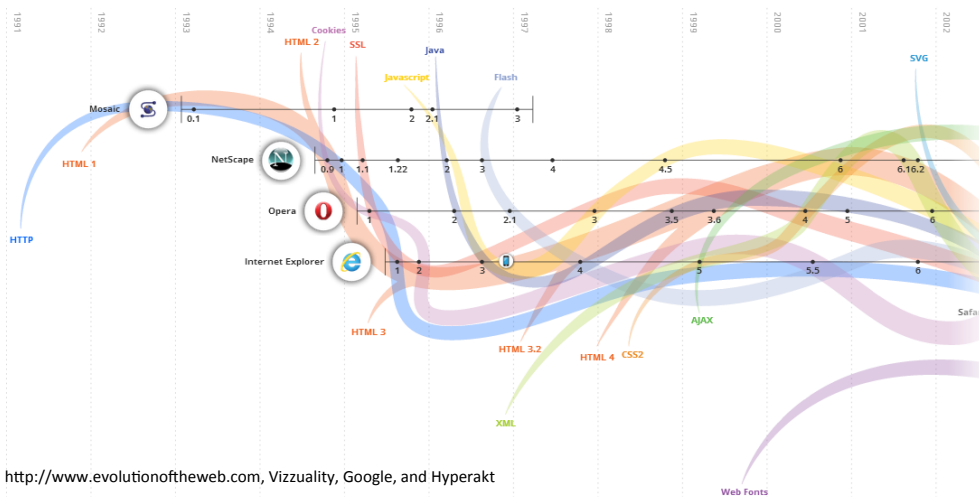


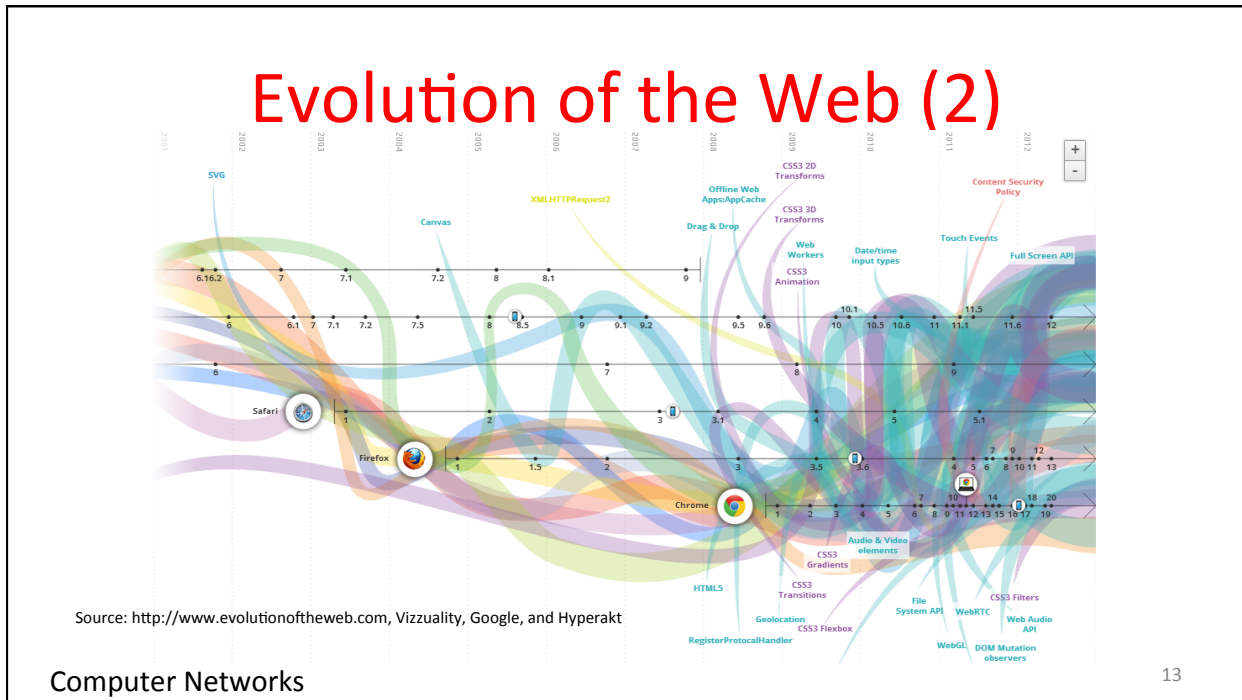

- ## Topics
- Evolving Internet applications
  - DNS (Domain Name System)
  - HTTP (HyperText Transfer Protocol)
  - Web proxies and caching
  - Content Distribution Networks
  - Peer-to-peer (BitTorrent)
- } This time
- Real-time applications (VoIP)
- } See Book
- Computer Networks 14


## Domain Name System (DNS) Part 1 (§7.1.1-7.1.2)

- The DNS (Domain Name System)
  - Human-readable host names, and more
  - Part 1: the distributed namespace

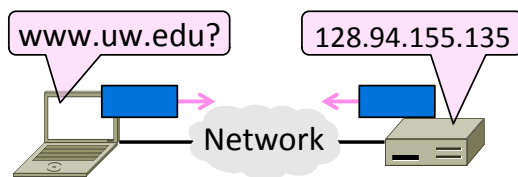

## Names and Addresses

- Names are higher-level identifiers for resources
- Addresses are lower-level locators for resources
  - Multiple levels, e.g. full name → email → IP address → Ethernet address
- Resolution (or lookup) is mapping a name to an address

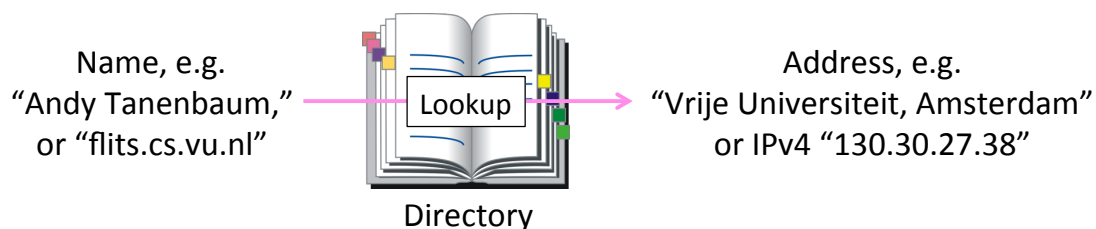



## Before the DNS – HOSTS.TXT


- Directory was a file HOSTS.TXT regularly retrieved for all hosts from a central machine at the NIC (Network Information Center)
- Names were initially flat, became hierarchical (e.g., lcs.mit.edu) ~85
- Neither manageable nor efficient as the ARPANET grew ...

## DNS

- A naming service to map between host names and their IP addresses (and more)
  - www.uwa.edu.au → 130.95.128.140
- Goals:
  - Easy to manage (esp. with multiple parties)
  - Efficient (good performance, few resources)
- Approach:
  - Distributed directory based on a hierarchical namespace
  - Automated protocol to tie pieces together

## DNS Namespace

- Hierarchical, starting from “.” (dot, typically omitted)

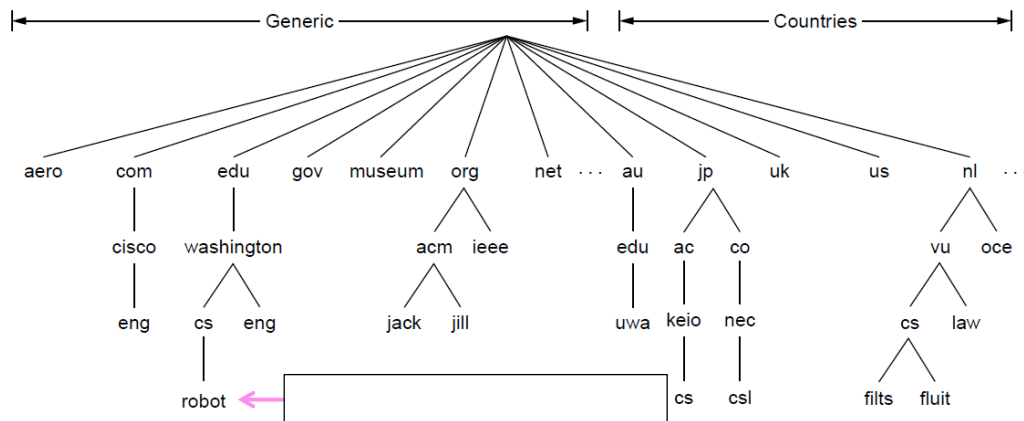

Computer Networks

19

## TLDs (Top-Level Domains)


- Run by ICANN (Internet Corp. for Assigned Names and Numbers)
  - Starting in '98; naming is financial, political, and international ☺
- 22+ generic TLDs
  - Initially .com, .edu, .gov., .mil, .org, .net
  - Added .aero, .museum, etc. from '01 through .xxx in '11
  - Different TLDs have different usage policies
- ~250 country code TLDs
  - Two letters, e.g., “.au”, plus international characters since 2010
  - Widely commercialized, e.g., .tv (Tuvalu)
  - Many domain hacks, e.g., instagr.am (Armenia), goo.gl (Greenland)

Computer Networks

20

## DNS Zones

- A zone is a contiguous portion of the namespace

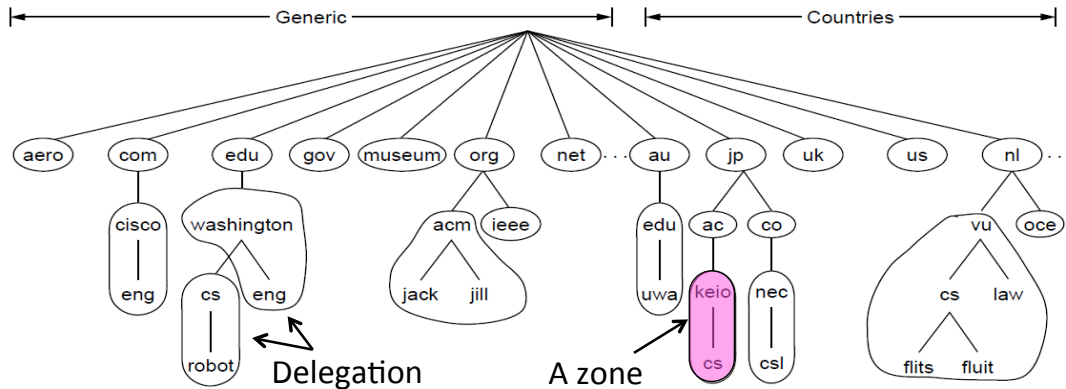

Computer Networks

21

## DNS Zones (2)

- Zones are the basis for distribution
  - EDU Registrar administers .edu
  - UW administers washington.edu
  - CS&E administers cs.washington.edu
- Each zone has a nameserver to contact for information about it
  - Zone must include contacts for delegations, e.g., .edu knows nameserver for washington.edu

Computer Networks

22

## DNS Resource Records

- A zone is comprised of DNS resource records that give information for its domain names

Type	Meaning
SOA	Start of authority, has key zone parameters
A	IPv4 address of a host
AAAA ("quad A")	IPv6 address of a host
CNAME	Canonical name for an alias
MX	Mail exchanger for the domain
NS	Nameserver of domain or delegated subdomain

## DNS Resource Records (2)

```

; Authoritative data for cs.vu.nl
cs.vu.nl.      86400  IN  SOA    star boss (9527,7200,7200,241920,86400)
cs.vu.nl.      86400  IN  MX     1 zephyr
cs.vu.nl.      86400  IN  MX     2 top
cs.vu.nl.      86400  IN  NS     star
star           86400  IN  A      130.37.56.205
zephyr        86400  IN  A      130.37.20.10
top           86400  IN  A      130.37.20.11
www           86400  IN  CNAME  star.cs.vu.nl
ftp           86400  IN  CNAME  zephyr.cs.vu.nl

flits         86400  IN  A      130.37.16.112
flits         86400  IN  A      192.31.231.165
flits         86400  IN  MX     1 flits
flits         86400  IN  MX     2 zephyr
flits         86400  IN  MX     3 top

rowboat       IN  A      130.37.56.201
              IN  MX     1 rowboat
              IN  MX     2 zephyr

little-sister IN  A      130.37.62.23
laserjet     IN  A      192.31.231.216

```


← Name server

← IP addresses of computers

← Mail gateways

## Domain Name System (DNS) Part 2 (§7.1.3)


- The DNS (Domain Name System)
  - Human-readable host names, and more
  - Part 2: Name resolution

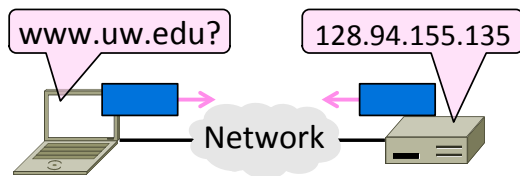

25

## Recall

- A zone is a contiguous portion of the namespace
  - Each zone is managed by one or more nameservers

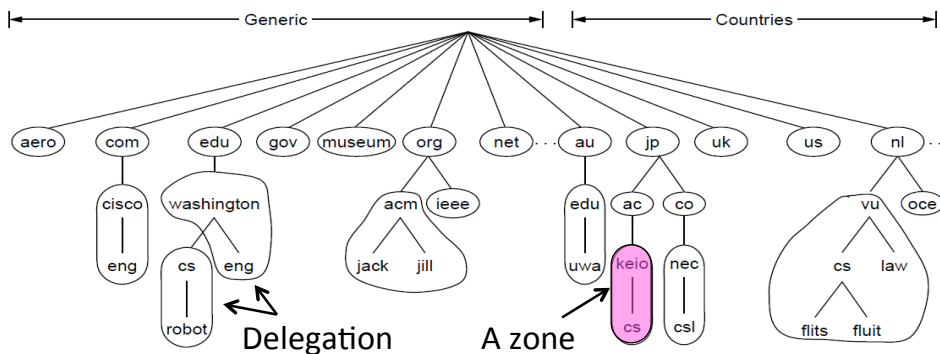

26


## DNS Resolution

- DNS protocol lets a host resolve any host name (domain) to IP address
- If unknown, can start with the root nameserver and work down zones
- Let's see an example first ...

27

## DNS Resolution (2)

- flits.cs.vu.nl resolves robot.cs.washington.edu

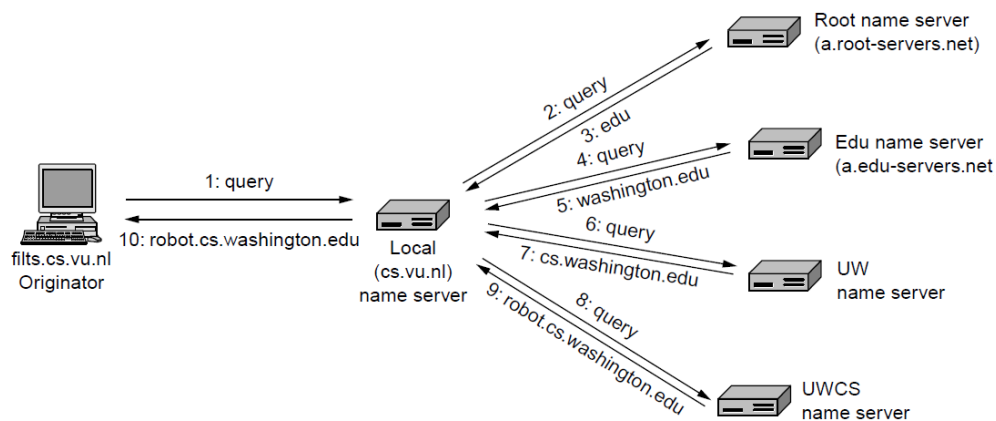

28

## Iterative vs. Recursive Queries

- Recursive query
  - Nameserver completes resolution and returns the final answer
  - E.g., flits → local nameserver
- Iterative query
  - Nameserver returns the answer or who to contact next for the answer
  - E.g., local nameserver → all others

29


## Iterative vs. Recursive Queries (2)

- Recursive query
  - Lets server offload client burden (simple resolver) for manageability
  - Lets server cache over a pool of clients for better performance
- Iterative query
  - Lets server “file and forget”
  - Easy to build high load servers

30

## Caching


- Resolution latency should be low
  - Adds delay to web browsing
- Cache query/responses to answer future queries immediately
  - Including partial (iterative) answers
  - Responses carry a TTL for caching



31

## Caching (2)

- flits.cs.vu.nl now resolves eng.washington.edu
  - And previous resolutions cut out most of the process

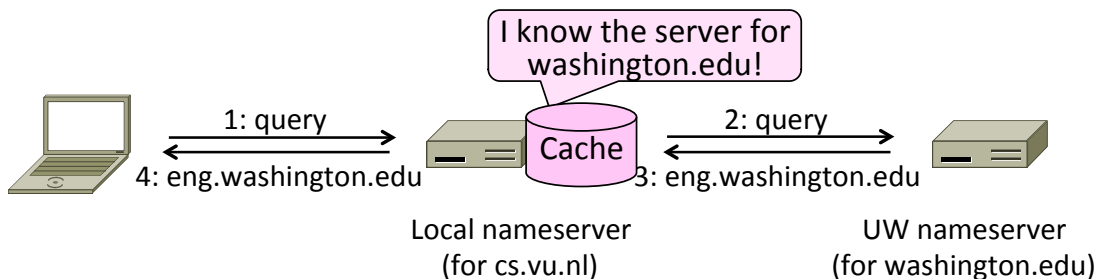

32



## Local Nameservers

- Local nameservers typically run by IT (enterprise, ISP)
  - But may be your host or AP
  - Or alternatives e.g., Google public DNS
- Clients need to be able to contact their local nameservers
  - Typically configured via DHCP


33

## Root Nameservers

- Root (dot) is served by 13 server names
  - a.root-servers.net to m.root-servers.net
  - All nameservers need root IP addresses
  - Handled via configuration file (named.ca)
- There are >250 distributed server instances
  - Highly reachable, reliable service
  - Most servers are reached by IP anycast (Multiple locations advertise same IP! Routes take client to the closest one. See §5.2.9)
  - Servers are IPv4 and IPv6 reachable

34


## Root Server Deployment

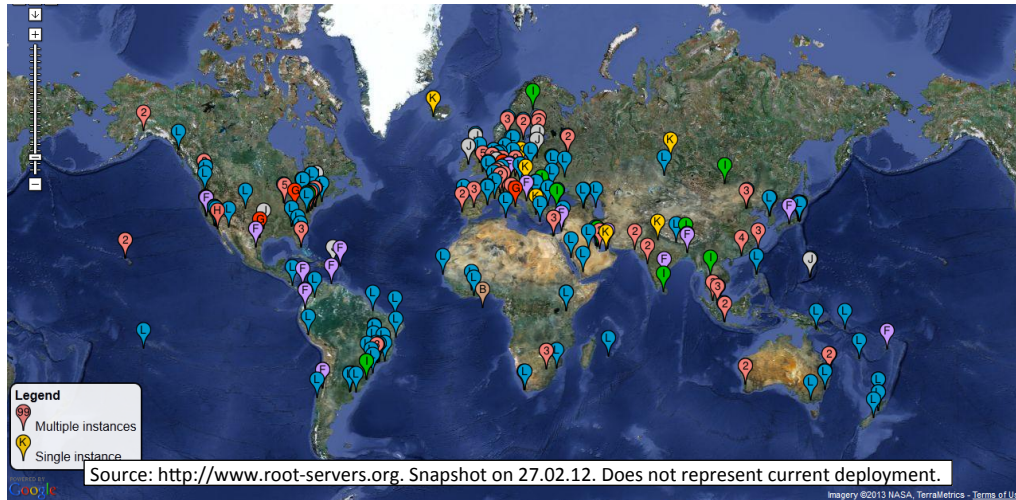

35

## DNS Protocol


- Query and response messages
  - Built on UDP messages, port 53
  - ARQ for reliability; server is stateless!
  - Messages linked by a 16-bit ID field

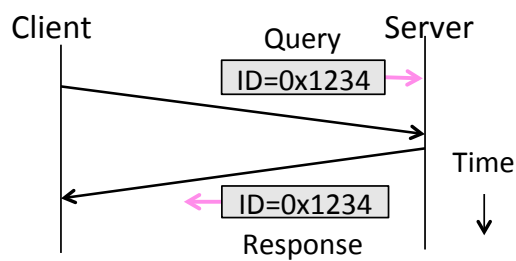

36

## DNS Protocol (2)


- Service reliability via replicas
  - Run multiple nameservers for domain
  - Return the list; clients use one answer
  - Helps distribute load too

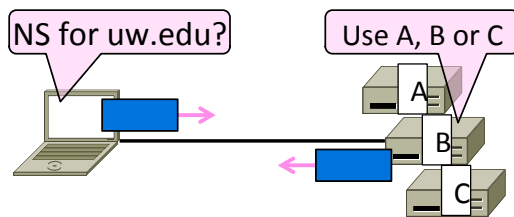

37

## DNS Protocol (3)


- Security is a major issue
  - Compromise redirects to wrong site!
  - Not part of initial protocols ..
- DNSSEC (DNS Security Extensions)
  - Long under development, now partially deployed

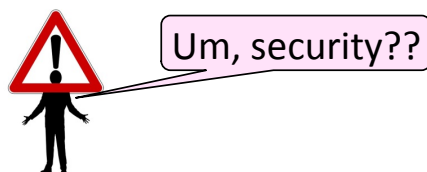

38

## HTTP, the HyperText Transfer Protocol (§7.3.1-7.3.4)

- HTTP, (HyperText Transfer Protocol)
  - Basis for fetching Web pages



Computer Networks

39

## Sir Tim Berners-Lee (1955–)



- Inventor of the Web
  - Dominant Internet app since mid 90s
  - He now directs the W3C
- Developed Web at CERN in '89
  - Browser, server and first HTTP
  - Popularized via Mosaic ('93), Netscape
  - First WWW conference in '94 ...



Source: By Paul Clarke, CC-BY-2.0, via Wikimedia Commons

Computer Networks

40

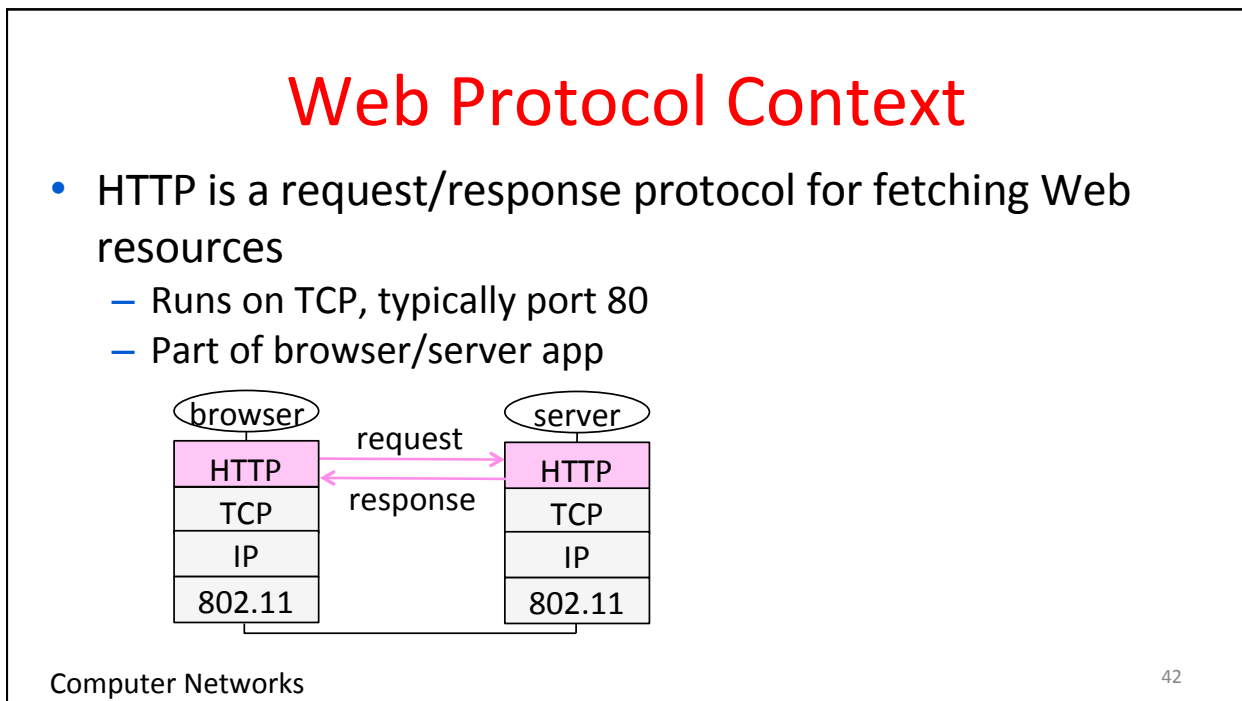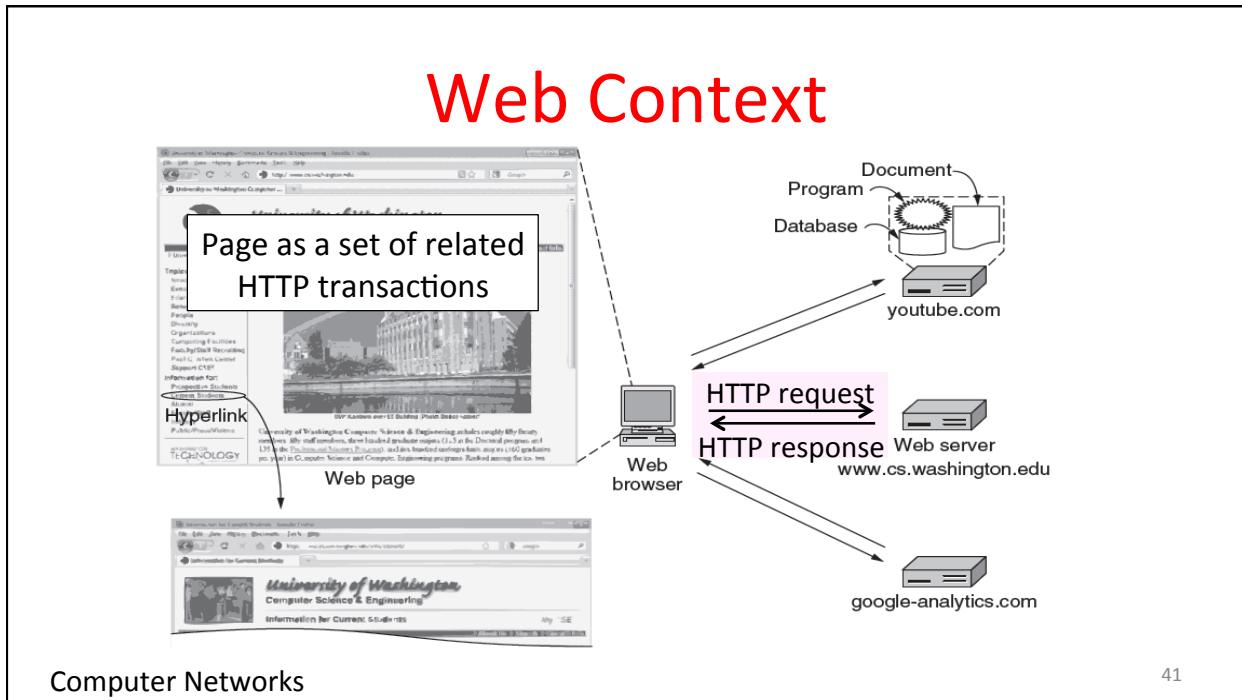


## Fetching a Web page with HTTP

- Start with the page URL:  
`http://en.wikipedia.org/wiki/Vegemite`  
 Protocol      Server      Page on server
- Steps:
  - Resolve the server to IP address (DNS)
  - Set up TCP connection to the server
  - Send HTTP request for the page
  - (Await HTTP response for the page)
  - \*\* Execute / fetch embedded resources / render
  - Clean up any idle TCP connections


## Static vs Dynamic Web pages

- Static web page is a file contents, e.g., image
- Dynamic web page is the result of program execution
  - Javascript on client, PHP on server, or both

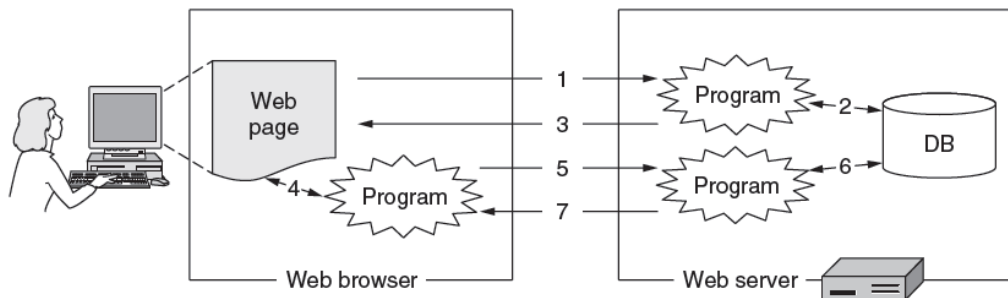

## Evolution of HTTP

- Consider security (SSL/TLS for HTTPS) later

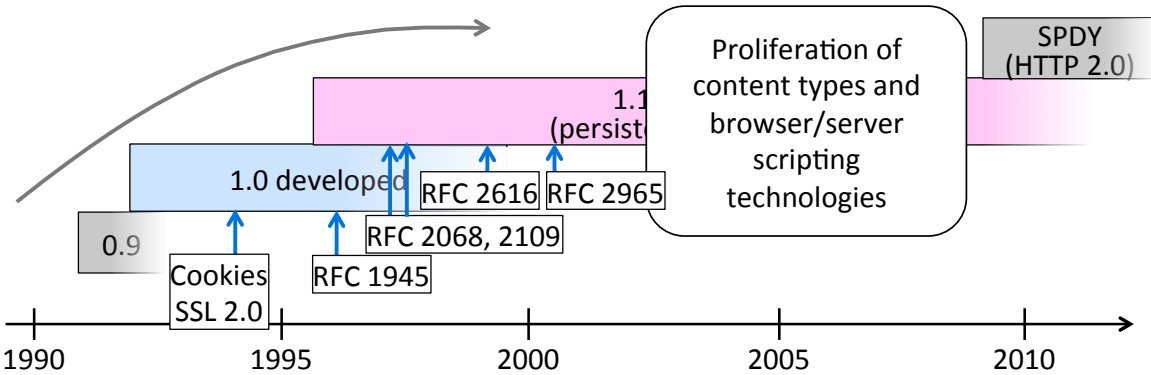

Computer Networks

45

## HTTP Protocol

- Originally a simple protocol, with many options added over time
  - Text-based commands, headers
- Try it yourself:
  - As a “browser” fetching a URL
  - Run “telnet en.wikipedia.org 80”
  - Type “GET /wiki/Vegemite HTTP/1.0” to server followed by a blank line
  - Server will return HTTP response with the page contents (or other info)

Computer Networks

46

## HTTP Protocol (2)

- Commands used in the request

	Method	Description
Fetch page →	GET	Read a Web page
	HEAD	Read a Web page's header
Upload data →	POST	Append to a Web page
	PUT	Store a Web page
	DELETE	Remove the Web page
	TRACE	Echo the incoming request
	CONNECT	Connect through a proxy
	OPTIONS	Query options for a page

Computer Networks

47

## HTTP Protocol (3)

- Codes returned with the response

	Code	Meaning	Examples
	1xx	Information	100 = server agrees to handle client's request
Yes! →	2xx	Success	200 = request succeeded; 204 = no content present
	3xx	Redirection	301 = page moved; 304 = cached page still valid
	4xx	Client error	403 = forbidden page; 404 = page not found
	5xx	Server error	500 = internal server error; 503 = try again later

Computer Networks

48




## HTTP Protocol (4)

- Many header fields specify capabilities and content
  - E.g., Content-Type: text/html, Cookie: lect=8-4-http

Function	Example Headers
Browser capabilities (client → server)	User-Agent, Accept, Accept-Charset, Accept-Encoding, Accept-Language
Caching related (mixed directions)	If-Modified-Since, If-None-Match, Date, Last-Modified, Expires, Cache-Control, ETag
Browser context (client → server)	Cookie, Referer, Authorization, Host
Content delivery (server → client)	Content-Encoding, Content-Length, Content-Type, Content-Language, Content-Range, Set-Cookie

## HTTP Performance (§7.3.4)

- Performance of HTTP
  - Parallel and persistent connections




## PLT (Page Load Time)

- PLT is the key measure of web performance
  - From click until user sees page
  - Small increases in PLT decrease sales
- PLT depends on many factors
  - Structure of page/content
  - HTTP (and TCP!) protocol
  - Network RTT and bandwidth


## Early Performance

- HTTP/1.0 uses one TCP connection to fetch one web resource
  - Made HTTP very easy to build
  - But gave fairly poor PLT ...

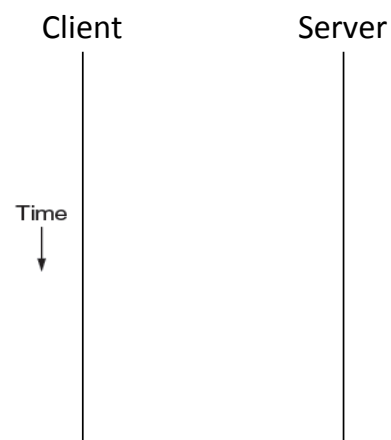


## Early Performance (2)

- HTTP/1.0 used one TCP connection resource
  - Made HTTP very easy to build
  - But gave fairly poor PLT...

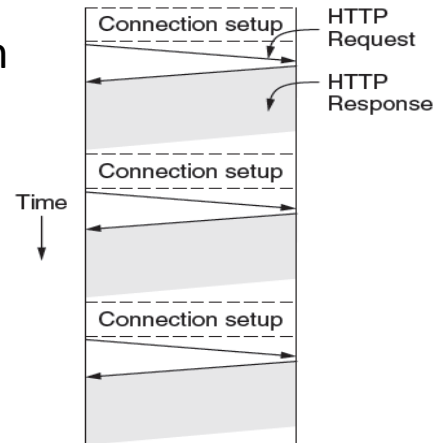

## Early Performance (3)

- Many reasons why PLT is larger than necessary
  - Sequential request/responses, even when to different servers
  - Multiple TCP connection setups to the same server
  - Multiple TCP slow-start phases
- Network is not used effectively
  - Worse with many small resources / page

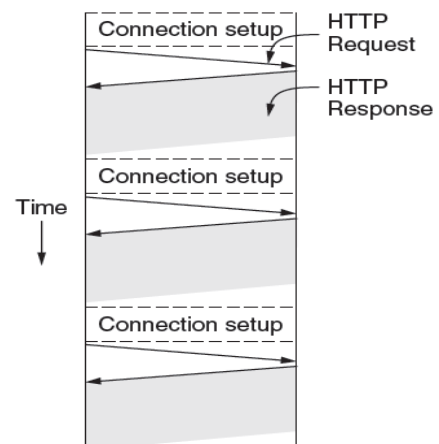

## Ways to Decrease PLT

1. Reduce content size for transfer
  - Smaller images, gzip
2. Change HTTP to make better use of available bandwidth
3. Change HTTP to avoid repeated transfers of the same content
  - Caching, and proxies
4. Move content closer to client
  - CDNs [later]


## Parallel Connections

- One simple way to reduce PLT
  - Browser runs multiple (8, say) HTTP instances in parallel
  - Server is unchanged; already handled concurrent requests for many clients
- How does this help?
  - Single HTTP wasn't using network much ...
  - So parallel connections aren't slowed much
  - Pulls in completion time of last fetch

## Persistent Connections

- Parallel connections compete with each other for network resources
  - 1 parallel client  $\approx$  8 sequential clients?
  - Exacerbates network bursts, and loss
- Persistent connection alternative
  - Make 1 TCP connection to 1 server
  - Use it for multiple HTTP requests

## Persistent Connections (2)

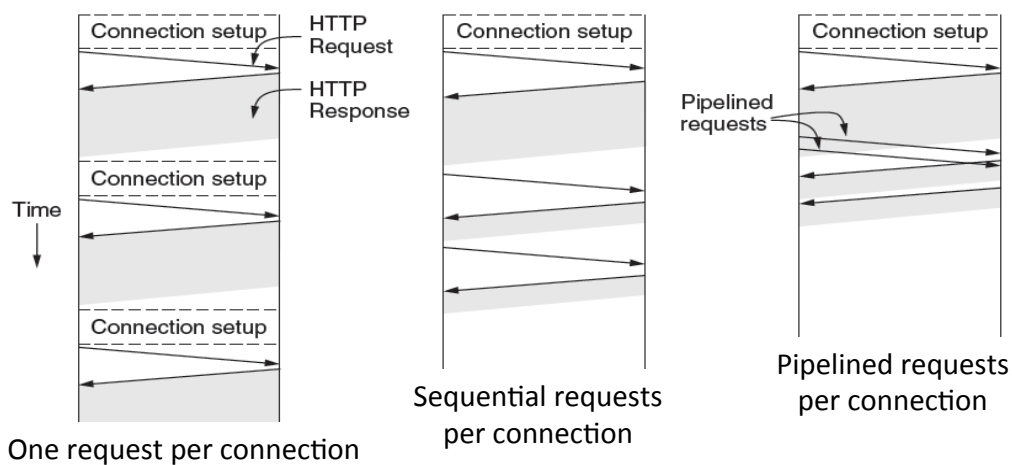


## Persistent Connections (3)

- Widely used as part of HTTP/1.1
  - Supports optional pipelining
  - PLT benefits depending on page structure, but easy on network
- Issues with persistent connections
  - How long to keep TCP connection?
  - Can it be slower? (Yes. But why?)


## HTTP Caching and Proxies (§7.3.4, §7.5.2)

- HTTP caching and proxies
  - Enabling content reuse

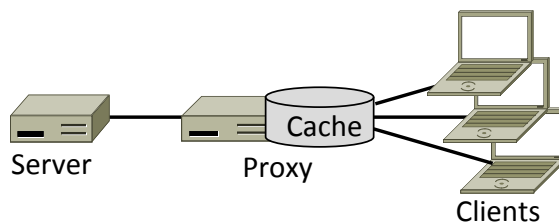

## Web Caching


- Users often revisit web pages
  - Big win from reusing local copy!
  - This is caching



- Key question:
  - When is it OK to reuse local copy?


## Web Caching (2)

- Locally determine copy is still valid
  - Based on expiry information such as “Expires” header from server
  - Or use a heuristic to guess (cacheable, freshly valid, not modified recently)
  - Content is then available right away




## Web Caching (3)

- Revalidate copy with remote server
  - Based on timestamp of copy such as “Last-Modified” header from server
  - Or based on content of copy such as “Etag” header from server
  - Content is available after 1 RTT



## Web Caching (4)

- Putting the pieces together:

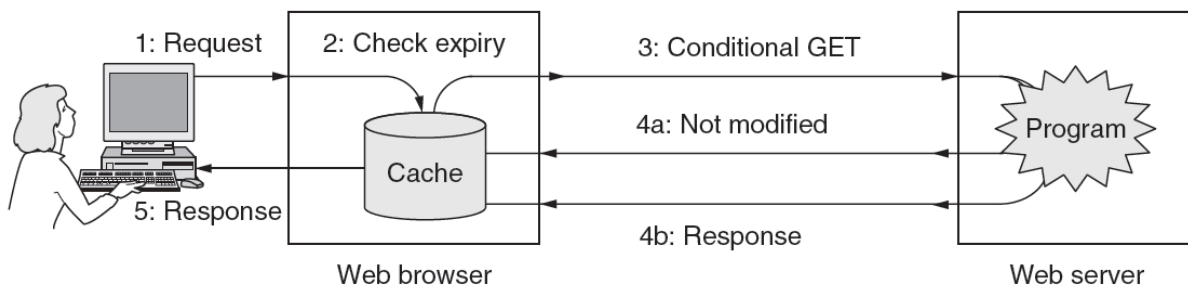




## Web Proxies

- Place intermediary between pool of clients and external web servers
  - Benefits for clients include greater caching and security checking
  - Organizational access policies too!
- Proxy caching
  - Clients benefit from larger, shared cache
  - Benefits limited by secure / dynamic content, as well as “long tail”


## Web Proxies (2)

- Clients contact proxy; proxy contacts server

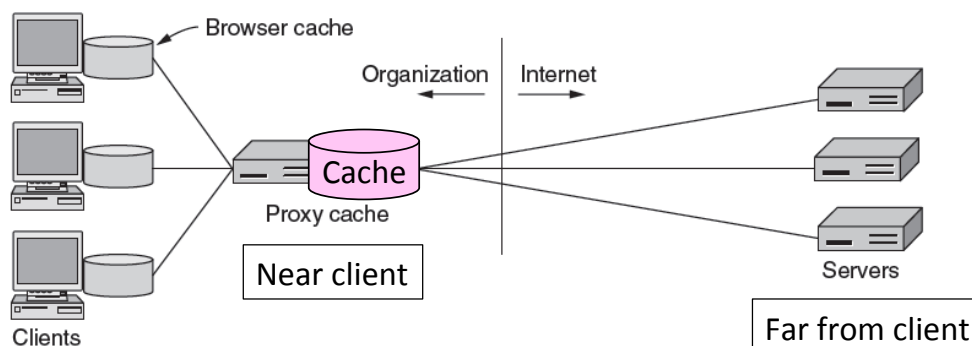

## CDNs (Content Delivery Networks) (§7.5.3)

- CDNs (Content Delivery Networks)
  - Efficient distribution of popular content; faster delivery for clients

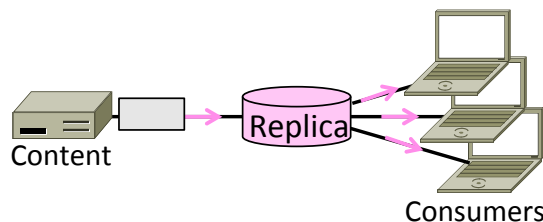


## Context

- As the web took off in the 90s, traffic volumes grew and grew. This:
  1. Concentrated load on popular servers
  2. Led to congested networks and need to provision more bandwidth
  3. Gave a poor user experience
- Idea:
  - Place popular content near clients
  - Helps with all three issues above

## Before CDNs

- Sending content from the source to 4 users takes  $4 \times 3 = 12$  “network hops” in the example

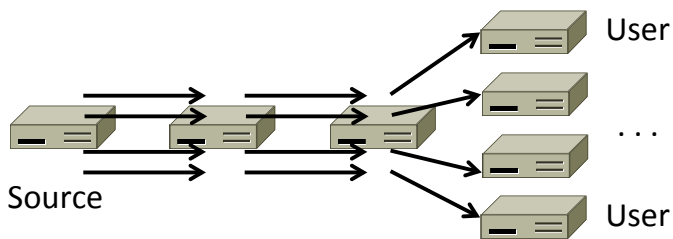


Computer Networks

69

## After CDNs

- Sending content via replicas takes only  $4 + 2 = 6$  “network hops”

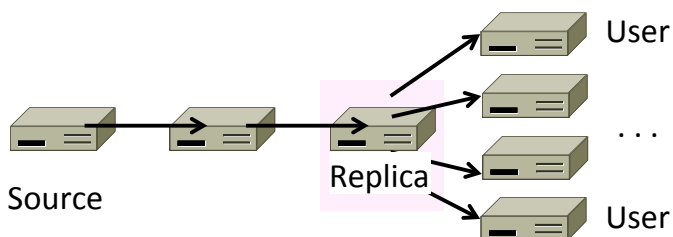


Computer Networks

70

## After CDNs (2)

- Benefits assuming popular content:
  - Reduces server, network load
  - Improves user experience (PLT)

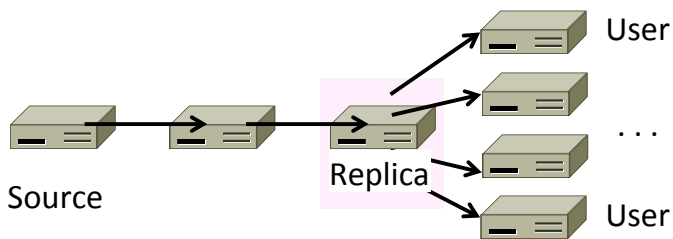


Computer Networks

71

## Popularity of Content

- Zipf's Law: few popular items, many unpopular ones; both matter

George Zipf (1902-1950)

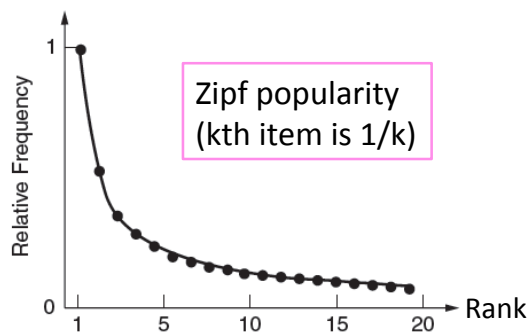

Source: Wikipedia


Computer Networks

72

## How to place content near clients?


- Use browser and proxy caches
  - Helps, but limited to one client or clients in one organization
- Want to place replicas across the Internet for use by all nearby clients
  - Done by clever use of DNS

## Content Delivery Network

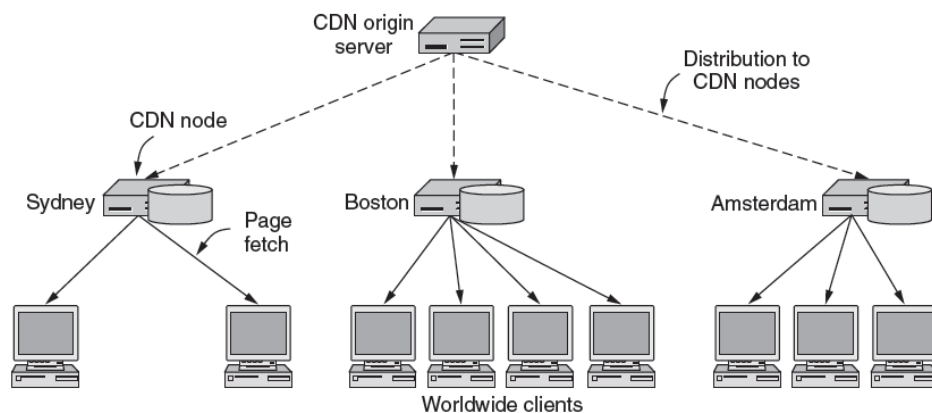

## Content Delivery Network (2)

- DNS resolution of site gives different answers to clients
  - Tell each client the site is the nearest replica (map client IP)

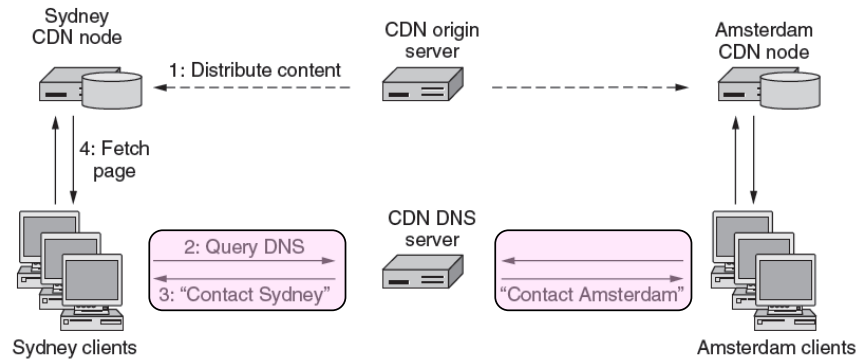


Computer Networks

75

## Business Model

- Clever model pioneered by Akamai
  - Placing site replica at an ISP is win-win
  - Improves site experience and reduces bandwidth usage of ISP

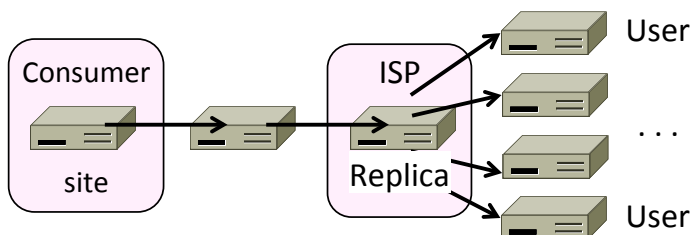


Computer Networks

76


# The Future of HTTP

- The Future of HTTP
  - How will we make the web faster?
  - A brief look at some approaches

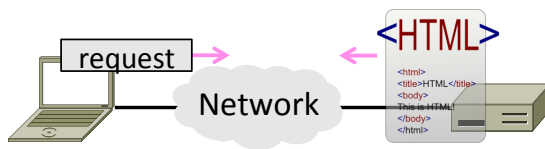

# Modern Web Pages


- Waterfall diagram shows progression of page load

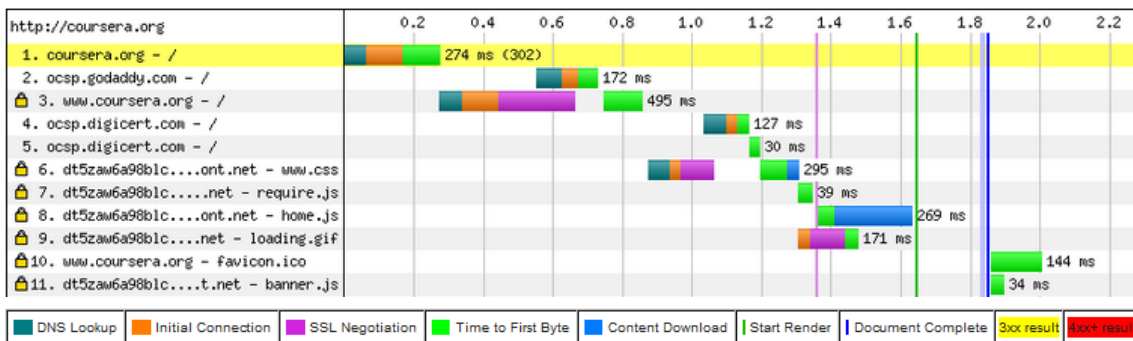

webpagetest tool for http://coursera.org (Firefox, 5/1 Mbps, from VA, 3/1/13)


## Modern Web Pages (2)

Yikes!  
 -23 requests  
 -1 Mb data  
 -2.6 secs

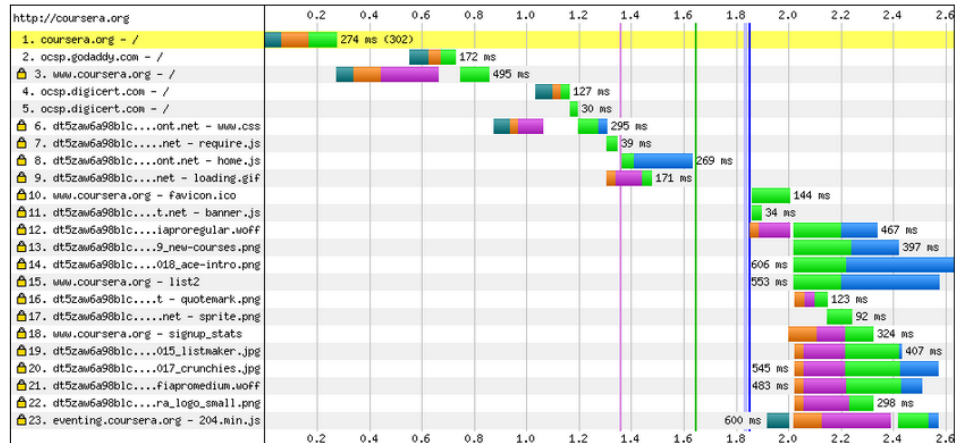

webpagetest tool for http://coursera.org (Firefox, 5/1 Mbps, from VA, 3/1/13)

## Modern Web Pages (3)

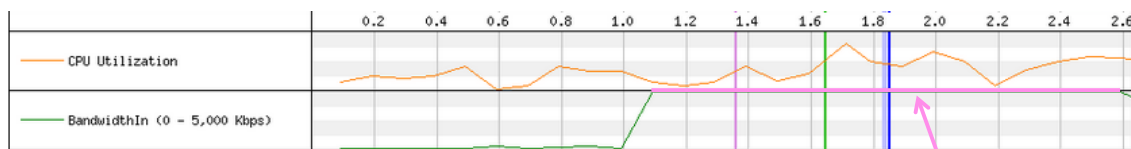

Yay! (Network used well)

- Waterfall and PLT depends on many factors
  - Very different for different browsers
  - Very different for repeat page views
  - Depends on local computation as well as network



## Recent work to reduce PLT

Pages grow ever more complex!

- Larger, more dynamic, and secure
- How will we reduce PLT?

1. Better use of the network
  - HTTP/2 effort based on SPDY
2. Better content structures
  - mod\_pagespeed server extension

## SPDY (“speedy”)

- A set of HTTP improvements
  - Multiplexed (parallel) HTTP requests on one TCP connection
  - Client priorities for parallel requests
  - Compressed HTTP headers
  - Server push of resources
- Now being tested and improved
  - Default in Chrome, Firefox
  - Basis for an HTTP/2 effort

## mod\_pagespeed


- Observation:
  - The way pages are written affects how quickly they load
  - Many books on best practices for page authors and developers
- Key idea:
  - Have server re-write (compile) pages to help them load quickly!
  - mod\_pagespeed is an example

## mod\_pagespeed (2)

- Apache server extension
  - Software installed with web server
  - Rewrites pages “on the fly” with rules based on best practices
- Example rewrite rules:
  - Minify Javascript
  - Flatten multi-level CSS files
  - Resize images for client
  - And much more (100s of specific rules)

## Peer-to-Peer Content Delivery (BitTorrent) (§7.5.4)

- Peer-to-peer content delivery
  - Runs without dedicated infrastructure
  - BitTorrent as an example

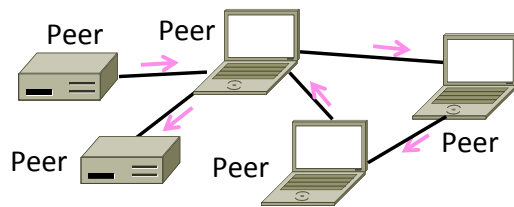

Computer Networks

85

## Context

- Delivery with client/server CDNs:
  - Efficient, scales up for popular content
  - Reliable, managed for good service
- ... but some disadvantages too:
  - Need for dedicated infrastructure
  - Centralized control/oversight

Computer Networks


86

## P2P (Peer-to-Peer)

- Goal is delivery *without* dedicated infrastructure or centralized control
  - Still efficient at scale, and reliable
- Key idea is to have participants (or peers) help themselves
  - Initially Napster '99 for music (gone)
  - Now BitTorrent '01 onwards (popular!)

## P2P Challenges

- No servers on which to rely
  - Communication must be peer-to-peer and self-organizing, not client-server
  - Leads to several issues at scale ...

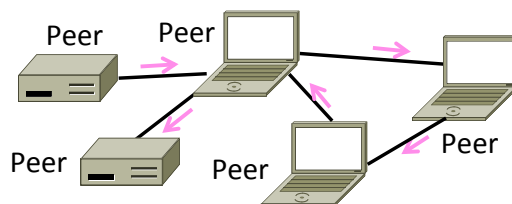


## P2P Challenges (2)

1. Limited capabilities
  - How can one peer deliver content to all other peers?
2. Participation incentives
  - Why will peers help each other?
3. Decentralization
  - How will peers find content?


## Overcoming Limited Capabilities

- Peer can send content to all other peers using a distribution tree
  - Typically done with replicas over time
  - Self-scaling capacity

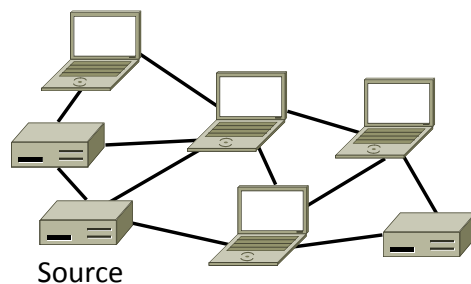

## Overcoming Limited Capabilities (2)

- Peer can send content to all other peers using a distribution tree
  - Typically done with replicas over time
  - Self-scaling capacity

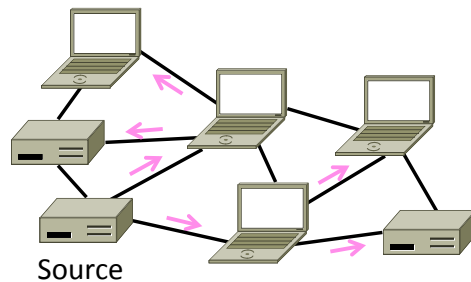


Computer Networks

91

## Providing Participation Incentives

- Peer play two roles:
  - Download ( $\rightarrow$ ) to help themselves, and upload ( $\leftarrow$ ) to help others

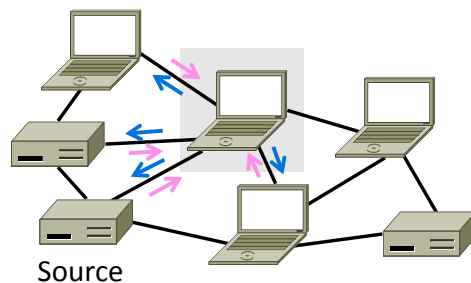


Computer Networks

92

## Providing Participation Incentives (2)

- Couple the two roles:
  - I'll upload for you if you upload for me
  - Encourages cooperation

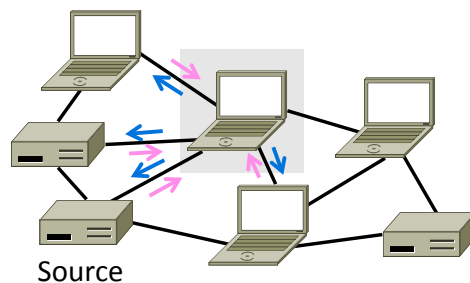

Computer Networks

93

## Enabling Decentralization

- Peer must learn where to get content
  - Use DHTs (Distributed Hash Tables)
- DHTs are fully-decentralized, efficient algorithms for a distributed index
  - Index is spread across all peers
  - Index lists peers to contact for content
  - Any peer can lookup the index
  - Started as academic work in 2001

Computer Networks

94

## BitTorrent

- Main P2P system in use today
  - Developed by Cohen in '01
  - Very rapid growth, large transfers
  - Much of the Internet traffic today!
  - Used for legal and illegal content
- Delivers data using “torrents”:
  - Transfers files in pieces for parallelism
  - Notable for treatment of incentives
  - Tracker or decentralized index (DHT)

Bram Cohen (1975—)



By Jacob Appelbaum, CC-BY-SA-2.0, from Wikimedia Commons


## BitTorrent Protocol

- Steps to download a torrent:
  1. Start with torrent description
  2. Contact tracker to join and get list of peers (with at least seed peer)
  4. Or, use DHT index for peers
  5. Trade pieces with different peers
  6. Favor peers that upload to you rapidly; “choke” peers that don’t by slowing your upload to them



## BitTorrent Protocol (2)

- All peers (except seed) retrieve torrent at the same time

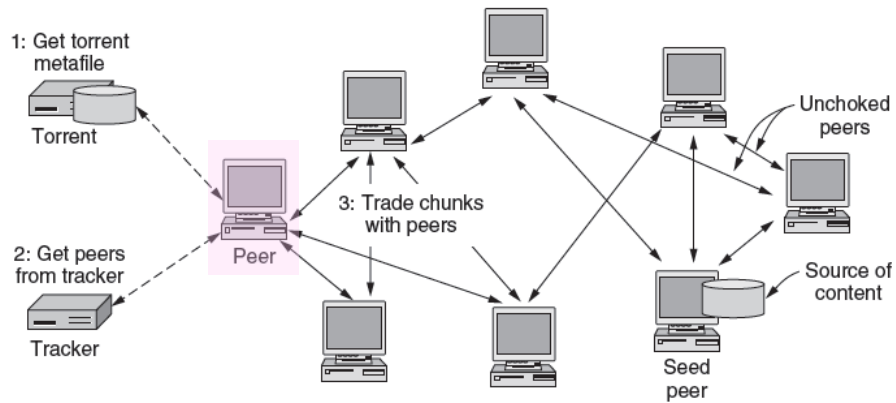


Computer Networks

97

## BitTorrent Protocol (3)

- Dividing file into pieces gives parallelism for speed

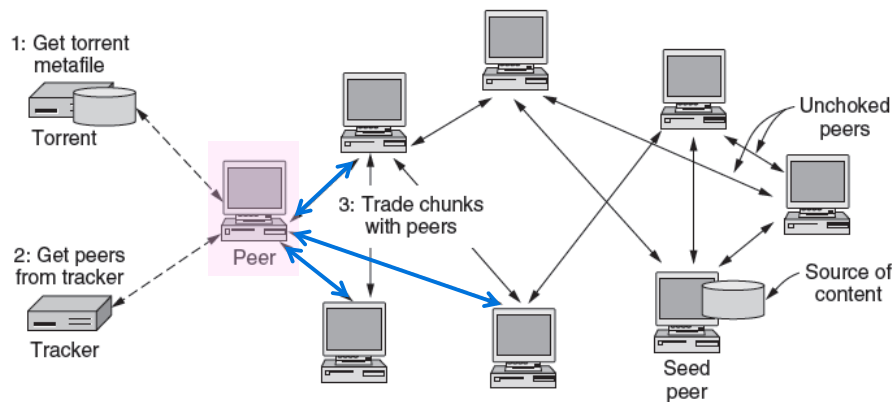


Computer Networks

98

## BitTorrent Protocol (4)

- Choking unhelpful peers encourages participation

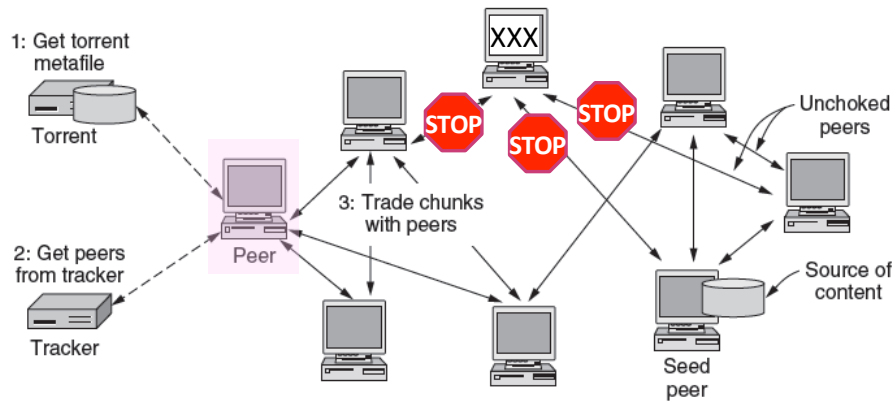


Computer Networks

99

## BitTorrent Protocol (5)

- DHT index (spread over peers) is fully decentralized

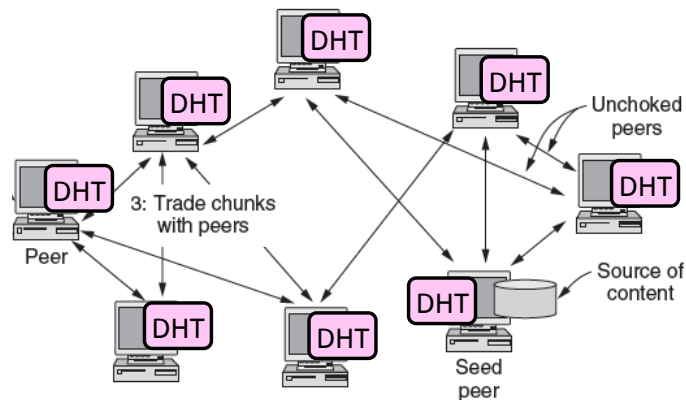

Computer Networks

100

## P2P Outlook

- Alternative to CDN-style client-server content distribution
  - With potential advantages
- P2P and DHT technologies finding more widespread use over time
  - E.g., part of skype, Amazon
  - Expect hybrid systems in the future